

SWINGER 2000

VERSATILE WHEEL LOADER & TOOL CARRIER

- Lifts up to 2,000 lbs
- Accepts most attachments
- Articulated — quick turning and maneuverable
- Standard auxiliary hydraulics
- Easy to operate
- Hydrostatic over mechanical drive — fast forward/reverse and easy maintenance
- Single lever “joy stick” bucket control simplifies operation

Swinger Model 2000 handles backfilling, pallet loading and material lifting/loading equally well. This 4WD articulated loader allows quick turns without skidding. Swinger is easy on sensitive surfaces like grass, turf and ground cover — ideal for work on golf courses, new asphalt, nurseries, etc.

2-speed transmission maximizes power or speed with the flip of a lever. “Low” range increases wheel torque — “high” range allows quick transport.


Simple to run. Wheel steering and single lever “joy stick” bucket control make loading easy. Low maintenance Model 2000 features hydrostatic-over-mechanical drive for extended service and easy upkeep.

Swinger Model 2000 — a versatile, dependable machine for your business.



Versatile Quick-Attach™ TOOL CARRIER SYSTEM

Swinger Model 2000 accepts most skid steer attachments. Separate auxiliary hydraulic system provides power for brooms, rakes and other tools. Model 2000 also has optional pallet forks — allows lifting and placement of dimensional loads such as pallets, fertilizer bags, boxes, etc. A simple Quick-Attach system makes changeover from one attachment to another quick and easy.

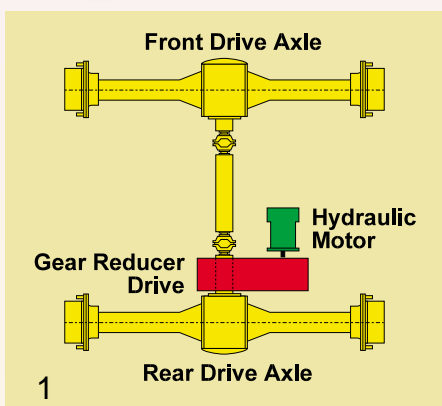

1. All Swinger loaders feature short run hydrostatic over mechanical drive for easy operation and simple maintenance. Diagram above shows hydrostatics (green motor) mounted to the gear reducer (red dropbox). It's simple mechanical drive from the dropbox to the wheels (yellow).
2. New capacities for the Model 2000 include a 10-foot lift pin height and a 2,000 lbs. SAE rated lift capacity.
3. Wide 31 x 15.5 x 15 Terra Grip flotation tires and 4WD help distribute load and boost tractive effort. Optional turf tires available.
4. Easy access engine compartment opens fore and aft. Allows fast inspection and maintenance of engine and power components.

SWINGER

Loader Division of NMC-WOLLARD, Inc.

1125 Starr Ave., Eau Claire, WI 54703 • 800-656-6867 • Phone: 715-835-3151
Fax: 715-835-6625 • www.nmc-wollard.com • E-mail: kbird@nmc-wollard.com

Specifications subject to change without notice

Model 2000 (with standard tires and 15 cu. ft. bucket)

Engine: Continental TMD 2.7 — diesel, 56 hp.

Drive line: Hydrostatic driven two speed transmission

Motor: Fixed displacement piston motor

Auxiliary hydraulics: 17 gpm gear pump @ 2,500 rpm

Axes: Dana Series 60

Length with standard bucket: 162"

Width, overall: 56"

Height, to top of ROPS: 94" with 31 x 15.5 x 15 tires

Turn radius: 52"

Maximum pin height: 120"

Dump reach at maximum lift height:

with standard bucket 20"

Dump height: Standard bucket 96"

Roll back angle: Standard bucket 32°

Dump angle: Standard bucket 43°

Breakout: 4,752 lbs.

SAE Operating capacity: 2,000 lbs.

Weight: 7,600 lbs.

Speed: 0-6 mph low range / 0-12 mph high range

Fuel capacity: 15.8 U.S. gallons

Hydraulic reservoir: 13 U.S. gallons

Hydraulic fluid spec.: ISO 46

Tires: 31 x 15.5 x 15 Terra Grip. Turf tires available.

Photos may show optional equipment